




# THE CAL 2000

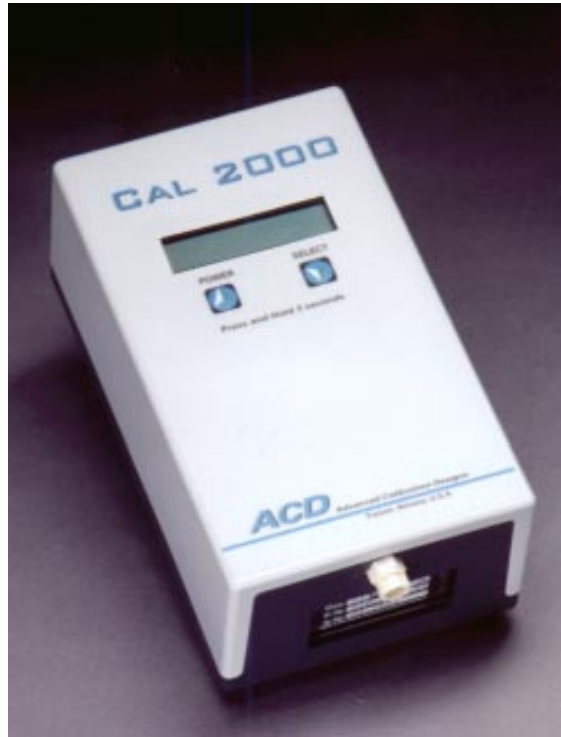

## ELECTROCHEMICAL CALIBRATION GAS

The **Cal 2000** provides unmatched versatility and accuracy in corrosive calibration gases. Field replaceable electro-chemical generating cells provide a calibration standard for accurately testing chlorine, chlorine dioxide, hydrogen, hydrogen cyanide, and hydrogen sulfide gas sensors.

The **Cal 2000** is microprocessor controlled and has an LCD display allowing field adjustable ppm and flow rate. The generating cells are interchangeable and field replaceable. Best of all, the **Cal 2000** provides up to **50 times** as much calibration gas as a disposable cylinder at approximately the same cost. The electrochemical generating cells do not degrade over time.

The **Cal 2000** gas generator has a built-in mass flow sensor that automatically compensates for altitude and temperature. The mass flow sensor combined with the instruments internal pump, provide extreme flexibility for calibrating both diffusion and sample draw detection systems.

The **Cal 2000** gas generator's features include:

- compact "hand-held" design
- adjustable ppm and flow rate
- low power consumption
- automatic purge on shut down
- alkaline battery powered
- interchangeable calibration gases

### Specifications

<b>Chlorine Micro-Cell (Cl<sub>2</sub>)</b> .....	0.05 - 1.0 ppm
<b>Chlorine (Cl<sub>2</sub>)</b> .....	0.5 - 50.0 ppm
<b>Chlorine Dioxide (ClO<sub>2</sub>)</b> .....	0.5 - 5.0 ppm
<b>Hydrogen (H<sub>2</sub>)</b> .....	0.5 - 50.0 ppm
<b>Hydrogen Cyanide (HCN)</b> .....	0.5 - 50.0 ppm
<b>Hydrogen Sulfide Micro-Cell(H<sub>2</sub>S)</b> .....	0.05 - 1.0 ppm
<b>Hydrogen Sulfide (H<sub>2</sub>S)</b> .....	0.5 - 50.0 ppm
(ppm is variable with flow rate, output given at 0.5 lpm)	
Air Flow Rate (with internal pump).....	0.2 to 1 LPM
Sample draw rate (with pump disabled).....	0.1 to 5 LPM
Useful Cell Life.....	50 hours
Warm-up time (to 90%).....	Approximately 5 minutes
L x W x H.....	8.50 x 4.25 x 3.00" (21.59 x 10.8 x 7.62 cm)
Weight.....	3 lb. (1360 g)
Operating Temperature.....	0° C to 50° C
Relative Humidity (intermittent use).....	0 -100%
Accuracy.....	±10%
Repeatability.....	±5%
Battery Power.....	4 alkaline "C"
Battery Life.....	25 - 30 hours (at .5 LPM flow rate)